



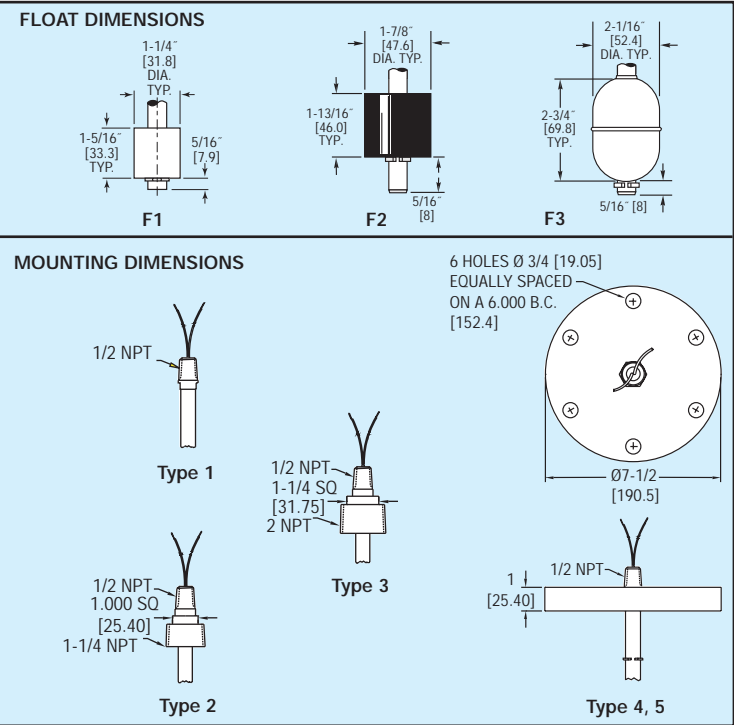

# Series CLT Continuous Level Transmitter

Customize To Fit Application, 316 SS or Buna-N Floats

Level

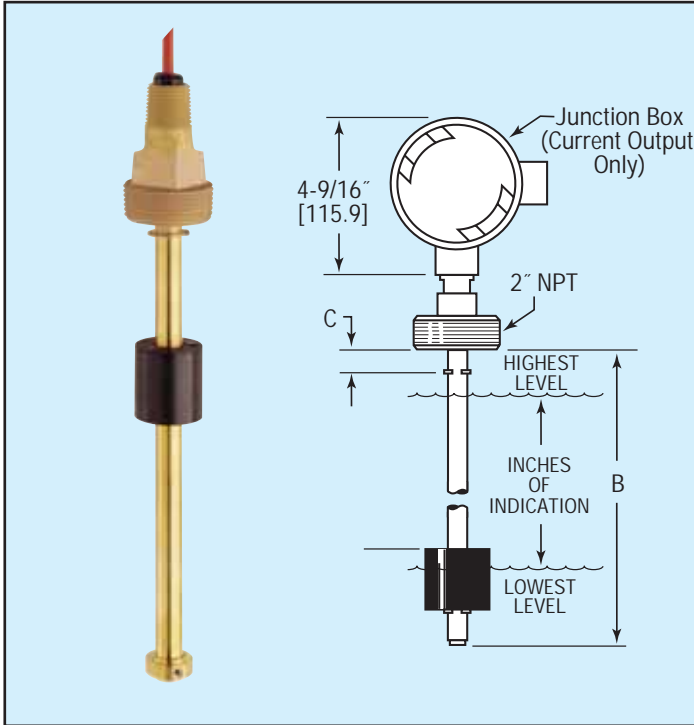

**Continuous Output Level Transmitters** provide up to the minute tank level monitoring. Customize level transmitters to meet application requirements. Transmitters can be configured for 4 to 20 mA or proportional voltage output, stainless steel or Buna-N floats, and lengths up to 72" (183 cm).

Models are built to your specifications.

### SPECIFICATIONS

- Service:** Compatible liquids.
- Resolution:** 1/4".
- Temperature Limits:** Buna-N floats: 180°F (82°C) in water, -40 to 230°F (-40 to 110°C) in oil; SS floats: -40 to 230°F (-40 to 110°C).
- Pressure Limits:** Buna-N floats: 150 psig (10 bar); SS floats: 300 psig (21 bar).
- Power Requirements:** Proportional voltage output models: 10 to 30 VDC; 4-20 mA output models: 10 to 40 VDC.
- Loop Resistance:** 1.4 kΩ maximum.
- Electrical Connections:** Proportional voltage output: 24" (61 cm) free leads #22 AWG, TFE jacketed; 4-20 mA output: Junction box.
- Enclosure Rating:** 4-20 mA models, NEMA 4 junction box.
- Mounting Orientation:** Vertical ±20°.

Example	CLT	V	S	5	F3	20.25	02.00	23.50	CLT-VS5F3-20.25-02.00-23.50
Construction	CLT								Continuous Level Transmitter
Output		V C							Voltage, proportional signal of 0 to supply voltage 4-20 mA
Stem and Connection Material			B S						Brass with Beryllium copper stops 316 SS with SS ARMCO PH-15-7MO stops
Connection Type				1 2 3 4 5					1/2" NPT (Output Type V only) 1-1/4" NPT (Float F1 only) 2" NPT 3" 150# Flange, Carbon Steel (Connection material S only) (Max. pres. 150 psi (10.3 bar)) 3" 150# Flange, 316 SS (Connection material S only) (Max. pres. 150 psi (10.3 bar))
Float Type					F1				<b>Material</b>
					F2				<b>Min s.g.</b>
					F3				<b>Max. Pres. psi (bar)</b>
									<b>Float Factor in (mm)</b>
									Buna N 0.55 150 (10.3) 2.0 (50.8)
									Buna N 0.55 150 (10.3) 2.5 (63.5)
									316 SS 0.75 300 (20.7) 3.5 (52.4)
Indication Length						00.00			Length that the unit sends an output for level. Maximum is 68" (173 cm).
Top Float Stop "C" Dimension							00.00		Distance from bottom of mounting connection to upper float stop. Minimum is 1/4" (6.4 mm)
Overall Length "B"								00.00	To calculate overall length, add Indication Length, Top Float Stop Dimension "C", and Float Factor. Maximum length is 72" (1.82 m)