


A Pyromation MgO thermocouple assembly consists of a thermocouple element swaged in hard-packed standard purity (96%) Magnesium Oxide mineral insulation and encased in a metal sheath. Thermocouple sheaths have been fully annealed; they can be formed into many configurations, and can be bent into a radius of twice the size of its outer sheath. The tables found on this page and the following pages allow customer selection of standard thermocouple types as listed in the General Information section, sheath diameters, mounting fittings and terminations. Custom built products are available upon request.

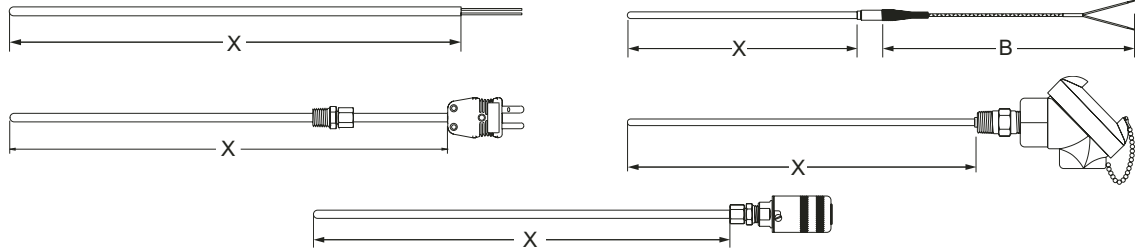

ORDER CODES

Example Order Number:

1-1 1-2 1-3 1-4 1-4 A 1-5
K 4 8 G M - 012 - For Optional Sheath Mounting Fittings See Page MgO-2

1-1 Thermocouple Types

CODE	
SINGLE	DUPLEX
E	EE
J	JJ
K	KK
T	TT
N	NN

1-2 Sheath Diameters

CODE	DIAMETER (INCHES)
1	1/16 ¹
2	1/8
3	3/16
4	1/4
6	3/8

1) 1/16" will be coiled unless otherwise specified for 36" and longer lengths.

1-3 Sheath Materials

CODE	MATERIAL	STANDARD AVAILABLE TYPES
3	Inconel 600	J, K, N
4	310 Stainless steel	K
5	446 Stainless steel	K*
8	316 Stainless steel	E, J, K, T
9	304 Stainless steel	E, J, K, T

* All sensors with 446SS sheaths must have an ungrounded measuring junction.

1-5 'X' Dimension

Insert three digit sheath length (X Dimension) in inches
 Sheath lengths over 98" will be shipped in a coiled configuration unless otherwise specified.

1-4 A Special Options

CODE	DESCRIPTION
M	Special limits of error
H	High purity MgO insulation (99.6% pure)

Use this table only if options are desired.

1-4 Measuring Junctions


CODE	DESCRIPTION
G	Grounded junction
U	Ungrounded junction
E	Exposed junction
S	Exposed shielded junction

1-2 A Reduced Tip MgO Thermocouples

CODE	NORMAL SHEATH DIA. OD (INCHES)	TIP DIA. (INCHES)	TIP LENGTH (INCHES)	MATERIAL
88R48	1/2	1/4	1 1/4	316 SS
68R38	3/8	3/16	1 1/4	316 SS
68R28	3/8	1/8	1 1/4	316 SS
48R38	1/4	3/16	1 1/4	316 SS
48R28	1/4	1/8	1 1/4	316 SS

Table 1-2 A lists thermocouple elements with reduced tip sheaths. To order, use order code numbers from Tbl. 1-2 A in place of straight sheath order code numbers from Tbl. 1-2 and 1-3. Other reduced tips, for 316SS constructions, available upon request. EXAMPLE: J48R38G

Select Sheath Mounting or Bend Options as desired from tables below.

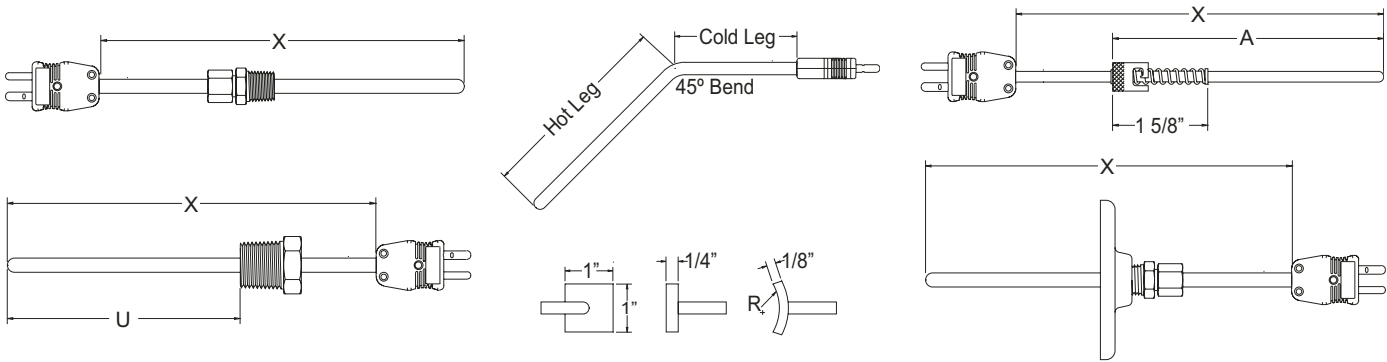

ORDER CODES

Example Order Number:

K48GM - 012 - 01A,306

Page MgO-3

Page MgO-4

Page MgO-5

Page MgO-6

2-1 No Fitting or Bend Options

CODE	00
------	----

2-2 One-Time Adjustable Compression Fittings

CODE	TYPE	NPT SIZE (INCHES)	PRESSURE RATED	AVAILABLE SHEATH DIAMETERS (INCHES)
01A	303 Stainless steel	1/8	NO	1/16, 1/8, 3/16, 1/4
05A	316 Stainless steel	1/8	YES	1/16, 1/8, 3/16, 1/4
05B	316 Stainless steel	1/4	YES	1/8, 3/16, 1/4, 3/8
05C	316 Stainless steel	1/2	YES	1/8, 1/4, 3/8
15A	Brass	1/8	NO	1/8, 3/16, 1/4
15B	Brass	1/4	NO	3/16, 1/4, 3/8
15C	Brass	1/2	NO	1/4, 3/8

2-3 Re-Adjustable Compression Fittings

CODE	TYPE	NPT SIZE (INCHES)	AVAILABLE SHEATH DIAMETERS (INCHES)
10A	303 Stainless steel	1/8	1/16, 1/8, 3/16
10B	303 Stainless steel	1/4	1/4, 3/8
10C	303 Stainless steel	1/2	3/8, 1/4
12A	316 Stainless steel	1/8	1/16, 1/8, 3/16, 1/4
12B	316 Stainless steel	1/4	1/8, 3/16, 1/4, 3/8
12C	316 Stainless steel	1/2	1/8, 1/4, 3/8
11A	Brass	1/8	1/16, 1/8, 3/16, 1/4
11B	Brass	1/4	1/8, 3/16, 1/4, 3/8
11C	Brass	1/2	1/4, 3/8
19C	Spring-loaded SS well fitting	1/2	3/16, 1/4

Teflon® gland standard 204 °C [400 °F] max. For lava gland 649 °C [1200 °F] max. opt. 10A and 10B only use letter suffix "L" after compression fitting order code. EXAMPLE: 10AL for lava gland.

2-4 Fixed Bushings

CODE	MOUNTING THREAD NPT (INCHES)	AVAILABLE SHEATH DIAMETERS (INCHES)
316 SS		
8A __ *	1/8	1/16, 1/8, 3/16, 1/4
8B __ *	1/4	1/16, 1/8, 3/16, 1/4, 3/8
8C __ *	1/2	1/8, 3/16, 1/4, 3/8
8D __ *	3/4	1/8, 3/16, 1/4, 3/8

*When ordering fixed bushings, specify order code above plus inserting length "U", as measured from hot tip to bottom of threaded bushing. EXAMPLE: order code 8A06 is 1/8" NPT, 316 SS bushing located 6" from hot tip.

2-5 Sheath Bends

CODE	DESCRIPTION
2 __	Sheath bent 45°
3 __	Sheath bent 90°

When ordering bend options, specify hot leg dim. "U". EX: order code 206 is a 45° bend with 6" hot leg. Total sheath length is Table 1 "X" length = hot leg plus cold leg.


2-6 Weld Pads

CODE	DESCRIPTION
17	304 SS weld pad 1" x 1" x 1/4" thick perpendicular mount
18	304 SS weld pad 1" x 1" x 1/4" thick horizontal mount
17R*	304 SS weld pad 1" x 1" x 1/8" thick perpendicular mount with radius bend *(specify radius)
18R*	304 SS weld pad 1" x 1" x 1/8" thick horizontal mount with radius bend *(specify radius)

2-7 Miscellaneous Options

CODE	DESCRIPTION	AVAILABLE SHEATH DIAMETERS (INCHES)
13A __ *	Spring-loaded bayonet fitting	1/8, 3/16
14	Adjustable flange with brass compression fitting	1/8, 3/16, 1/4, 3/8
16A	Compression fitting with bayonet cap and spring	1/8 (2 5/8" min. 'A' dim.)

* When ordering fixed bayonet fitting specify hot leg dimension "A". EXAMPLE: order code 13A06 for a fixed bayonet adapter with 6" hot leg. Total sheath length is Table 1 "X" length = hot leg plus cold leg.

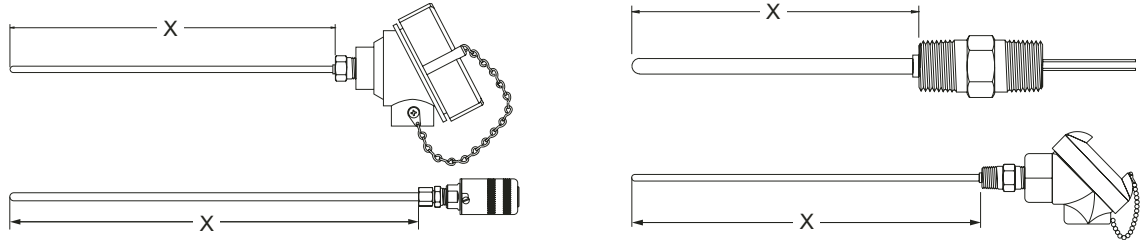

ORDER CODES

Example Order Number:

K48GM - 012 - 00 -

3-1 A 3-2 A 3-3 A

6HN 31, GS or

See Mgo-4 for Sheath Terminations and Leadwire Transition Options

3-1 A Head Mounting Fittings For Standard Heads (For head terminations, a head mounting fitting must be selected)

CODE	DESCRIPTION
6HN	1/2" x 1/2" NPT steel hex nipple
8HN	1/2" x 1/2" NPT stainless steel hex nipple
9HP	1/2" NPT stainless steel bushing (no process threads)
8RNDNC	3/4" x 1/2" NPT stainless steel hex nipple
22CF	Brass compression fitting (not available with head termination order codes 71, 72, 81, 82)

3-1A Head Mounting Fittings For Miniature Heads Options 17 & 25

CODE	DESCRIPTION
9HNB	1/4" x 1/4" stainless steel hex nipple
8HPB	1/4" NPT stainless steel bushing (no process threads)
22CF	Brass compression fitting

3-2 A Standard Head Terminations

CODE	DESCRIPTION
31	Aluminum screw cover head
34	Cast iron screw cover head
49	Flip top aluminum head
53	Grey delrin screw cover head
62	White DIN form B polypropylene head
63	White polypropylene head
69	Flip top polypropylene head
71	Cast iron/aluminum explosion proof head Group C
72	DIN form B aluminum explosion proof head Group B
81	316L stainless steel explosion proof head
82	DIN form B 316 stainless steel explosion proof head Group B
91	316L stainless steel head
92	DIN form B 316 stainless steel head

3-2 A Hex Fitting Termination Option Without Connection Head

CODE	DESCRIPTION
10	2" stripped leads (inset two digit strip length for other lead lengths - Ex. 10(03"))
22	3" individual Teflon® leads with terminal pins
23	Extension leadwire beyond hex (requires Table 5 and 6 selections)



3-2 A Miniature Head Terminations

CODE	DESCRIPTION
17	Miniature plastic head
25	Miniature nickel-plated head

3-3 A Standard Head Options

CODE	DESCRIPTION
BX	Box connector
CG	Nylon cord grip
CT	Ceramic terminal block
GS	Ground screw
I	Stainless steel tag
NB	1/2" NPT nylon conduit reducer bushing
SB	1/2" NPT plated steel conduit reducer bushing
T	Head mounted transmitter (see Instrument Section)
W*	Epoxy Coating

*Available with option 31 and 71 only

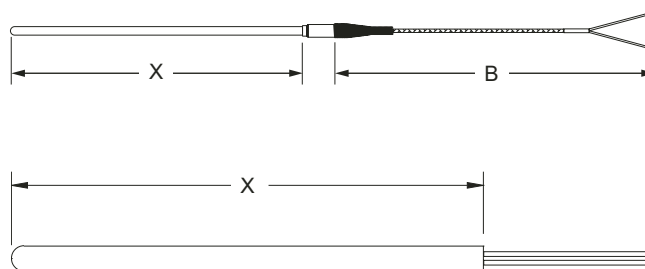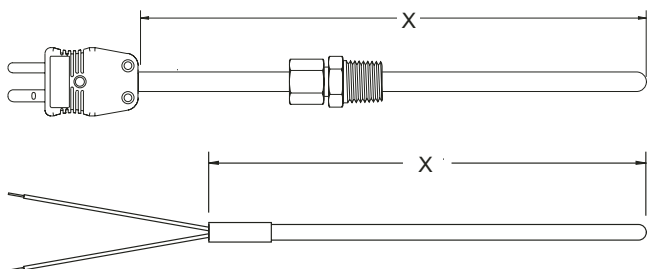

ORDER CODES

Example Order Number: **K48GM - 012 - 15C - ⁴⁻¹4, MC** or **K48GM - 012 - 00 - ⁴⁻¹16** - Page MgO-5 - Page MgO-6

4-1 Plug and Jack Sheath Terminations

CODE	DESCRIPTION
4*	Standard plug 177 °C [350 °F]
5*	Standard jack 177 °C [350 °F]
6	Miniature plug 177 °C [350 °F]
7	Miniature jack 177 °C [350 °F]
Options	
MC	Mating connector 177 °C [350 °F]
MT	Medium temp connector 260 °C [500 °F]
HT	High temp connector 427 °C [800 °F]
SP	Solid pin plug
CL	Compression L bracket to hold plug to sheath
*If used with a 3/8" OD sheath an option CL must be specified.	

4-1 Leadwire Transitions


(Requires Tbl. 5 and 6 selections)

CODE	DESCRIPTION
15	Extension leadwire transition with relief spring 204 °C [400 °F]
16	Extension leadwire transition with heat shrink tubing 104 °C [220 °F]
13*	Same size transition with heat shrink tubing 204 °C [400 °F]
18*	Same size transition without heat shrink tubing 204 °C [400 °F]
19	Extension leadwire transition w/o spring or heat shrink 204 °C [400 °F]
Options	
HT	High temperature potting 538 °C [1000 °F] not available with option 13 or 16
* Not available with Flex Armor	

4-1 Sheath Terminations

CODE	DESCRIPTION
10	2" stripped leads (inset two digit strip length for other lengths - ex. 10(03"))
14	Ceramic wafer head
22	Leadwire transition with 3" individual leads and terminal pins

Select desired leadwire type by order code number, followed by desired length in inches



ORDER CODES

Example Order Number: **K48GM - 012 - 01A,306 - 15 - F1048 -** 5 6 Page MgO-6

	CODE	DESCRIPTION	AVAILABLE CALIBRATIONS					TEMP RATING
Fiberglass	F1	Fiberglass insulation - solid conductor	J	K	T	E	N	900 °F
	F1A	Fiberglass insulation - solid conductor - flexible armor	J	K	T	E	-	900 °F
	F1B	Fiberglass insulation - solid conductor - stainless steel overbraid	J	K	T	E	N	900 °F
	F3	Fiberglass insulation - stranded conductor	J	K	T	E	-	900 °F
	F3A	Fiberglass insulation - stranded conductor - flexible armor	J	K	T	E	-	900 °F
	F3B	Fiberglass insulation - stranded conductor - stainless steel overbraid	J	K	T	-	-	900 °F
	H1	Hi-temp fiberglass insulation - solid conductor	J	K	-	-	-	1300 °F
	H1A	Hi-temp fiberglass insulation - solid conductor - flexible armor	J	K	-	-	-	1300 °F
	H1B	Hi-temp fiberglass insulation - solid conductor - stainless steel overbraid	J	K	-	-	-	1300 °F
Teflon®	T3J	Individual stranded Teflon® leads - 12 inch limit	J	K	-	E	-	400 °F
	T1	Teflon® insulation - solid conductor	J	K	T	E	-	400 °F
	T1A	Teflon® insulation - solid conductor - flexible armor	J	K	T	E	-	400 °F
	T1B	Teflon® insulation - solid conductor - stainless steel overbraid	J	K	-	-	-	400 °F
	T1M	Teflon® insulation - solid conductor - mylar shield	J	K	-	-	-	400 °F
	T3	Teflon® insulation - stranded conductor	J	K	T	E	-	400 °F
	T3A	Teflon® insulation - stranded conductor - flexible armor	J	K	T	E	-	400 °F
	T3B	Teflon® insulation - stranded conductor - stainless steel overbraid	J	K	-	-	-	400 °F
PVC	T3M	Teflon® insulation - stranded conductor - mylar shield	J	K	-	-	-	400 °F
	P5	PVC insulation - solid conductor	J	K	T	E	N	221 °F
	P7	PVC insulation - stranded conductor	J	K	T	E	-	221 °F
	P5M	PVC insulation - solid conductor - aluminum/mylar shield	J	K	T	E	-	221 °F
	P7M	PVC insulation - stranded conductor - mylar shield	J	K	-	-	-	221 °F
	C3060	PVC insulated coil cord - stranded; 60" extended	J	K	T	E	-	221 °F
Kapton®	C3120	PVC insulated coil cord - stranded; 120" extended	J	K	T	-	-	221 °F
	K1	Kapton® insulation - solid conductor	J	K	-	E	-	600 °F
	K1A	Kapton® insulation - solid conductor - flexible armor	J	K	-	E	-	600 °F
	K3	Kapton® insulation - stranded conductor	J	K	T	-	-	600 °F
	K3A	Kapton® insulation - stranded conductor - flexible armor	J	K	T	-	-	600 °F


- 1) Insert wire code number and 3 digit "B" length code. **Example: F1036 = 36" B length.**
- 2) For assemblies requiring leadwire beyond the flexible armor, illustrated as "C" in drawing, insert 3 digit "C" length after armor length. **Example: T1A036-012 = 36" B length with additional 12" C length leads beyond armor.**
- 3) Insulated leadwires in flexible armor are available with either extruded PVC or Teflon® covering over the flexible armor. Substitute suffix codes T (Teflon®) or P (PVC) for the suffix "A" code above. **Example: T3T is Teflon® covered armor.**
- 4) Duplex elements supplied with individual leads.

PyroMATION, INC.


© Copyright 2005 Pyromation, Inc., All Rights Reserved.

Select desired leadwire termination and options (if desired) by order code numbers below

OPTIONS 4 OR 4,MC

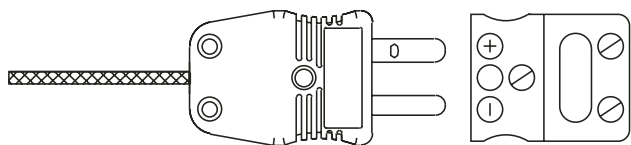

OPTIONS 6 OR 6,MC,CC



OPTION 3



OPTION 8



ORDER CODES

Example Order Number:

K48GM - 012 - 01A,306 - 15 - F1048 - 4, CC

6

6-1 Terminations

CODE	DESCRIPTION
0	Leads not stripped
2	2" split leads, 1/4" stripped
3	2" split leads with spade lugs
4	Standard plug (350 °F max)
5	Standard jack (350 °F max)
6	Miniature plug (350 °F max)
7	Miniature jack (350 °F max)
8	2" split leads with 1/4" quick disconnect female terminal lugs

Options

CODE	DESCRIPTION
BX	1/2" NPT Bx connector with Opt. 0, 1, 2, 3, or 8
CC	Plug or jack secured to leads with cable clamp
RB	Rubber Boot (only available on single termination)
SP	Solid pin plug (standard with 800 °F plug)
CG	Cord grip (1/2" NPT weatherproof PVC connector)
MC	Mating connector
MT	Medium temp. connector (500 °F)
HT	High temp. connector (800 °F)